




Unit 1&2, 24 Vore St, Silverwater, NSW 2128
 NSW: Tel: 02 9748 0655 Fax: 02 9748 0258
 VIC: Tel: 03 9886 7800 Fax: 03 9886 7799
 QLD: Tel: 07 3879 2133 Fax: 07 3879 2188

Email: sales@tenrod.com.au
 www.tenrod.com.au

MEGA LEDs

SPEC. TKP30L51RC2

Red 9000 mCd
 Ø 5mm Round

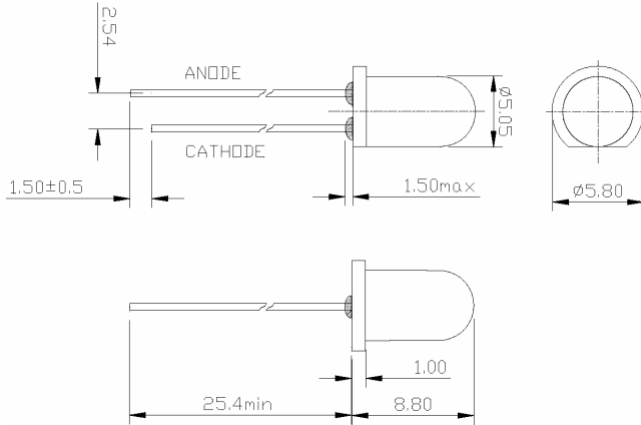

Notes:

1. All dimensions are in millimeters
2. Tolerance ±0.2 unless otherwise noted.
3. An epoxy meniscus may extend about 1.5mm down the leads.
4. Burr around bottom of epoxy may be 0.5mm max

Electrical and Optical Characteristics

$I_F = 20 \text{ mA}$ ($T_a = 25^\circ\text{C}$)


Viewing Angle	Dominant Wavelength ¹ (nm)	Luminous Intensity ² (mCd)		DC Forward Voltage ³ (V)	
		Min	Typ	Typ	Max
2θ _{1/2} 15°	623	4360	9000	2.4	2.6

Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

Power Dissipation	Forward Current(DC)	Peak Forward Current ⁴	Operation Temperature	Storage Temperature	Lead Soldering Temperature
P_D (mW)	I_F (mA)	I_F (mA)	T_{opr} (°C)	T_{stg} (°C)	T_{sol} (°C)
120	25	100	-20 ~ +75	-30 ~ +80	Max.260 °C for 5 sec Max. (3mm from the base of the epoxy bulb)

Notes:

1. Tolerance ± 1.0 nm
2. Tolerance ± 15 %
Intensity ranks: W (4360-6105), X (6105-8550), Y (8550-11970 mCd), Z (11970-16760 mCd)
3. Tolerance ± 0.1V
4. Pulse width ≤ 0.1msec duty ≤ 1/10
5. Viewing angle

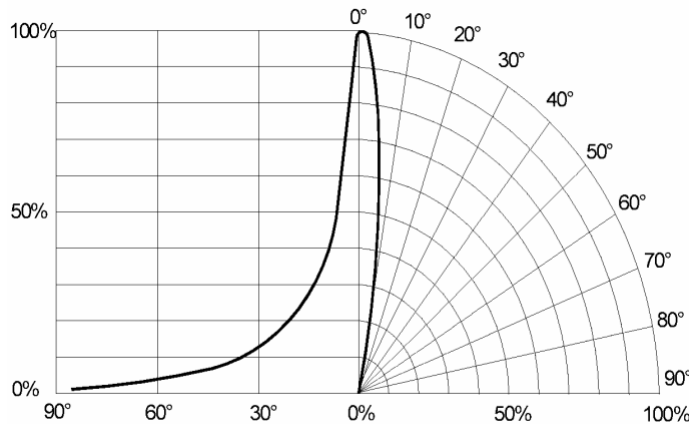

Relative Luminous Intensity vs. Radiation Angle

NOTE: Specifications are subject to change without further notice

Contact Tenrod for detailed specifications